

**Mirco-USB 母头, 面板式, 焊接型, 前锁**  
**Mirco-USB Female panel mount, Solder, Front fastened**



RoHS

IP67



**技术参数/Technical data**

适用温度/Ambient temperature	-20°C ~ +80°C
胶芯材料/Connector insert	LCP+GF/PBT
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PA+GF
螺丝/螺母材料/Connector nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥ 100MΩ
接触阻抗/Contact resistance	≤ 30mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

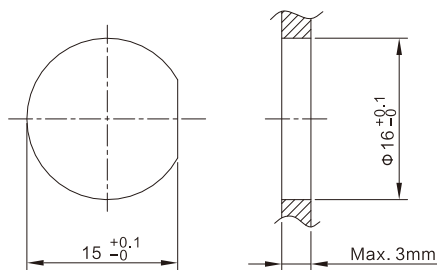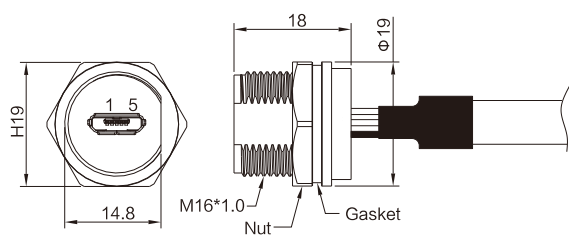

**订货信息/Ordering information**

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		芯线绝缘 Wire insulation	母头型号/Female model
			交流(A/C)	直流(A/C)		
5P Micro B型 母头	焊接型/ Solder version	1A	30V	30V	PVC/定制 Customized	USB-M16MAH05P-Q3

**Mirco-USB 母头, 面板式, 焊接型, 前锁**

**Mirco-USB Female panel mount, Solder, Front fastened**



RoHS

IP67




**技术参数/Technical data**

适用温度/Ambient temperature	-20°C ~ +80°C
胶芯材料/Connector insert	LCP+GF/PBT
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PA+GF
螺丝/螺母材料/Connector nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥ 100MΩ
接触阻抗/Contact resistance	≤ 30mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

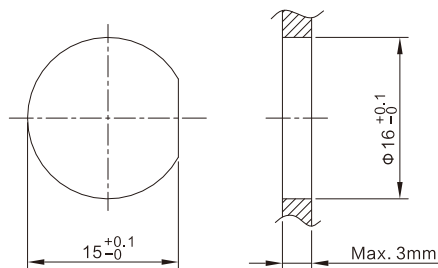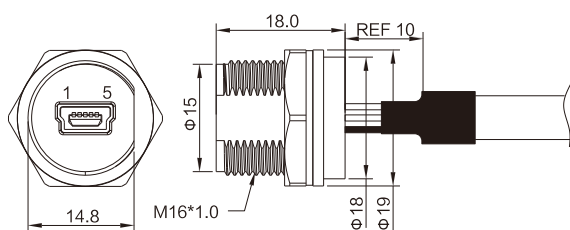

**订货信息/Ordering information**

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		芯线绝缘 Wire insulation	母头型号/Female model
			交流(A/C)	直流(A/C)		
 5P Mini B型 母头	焊接型/ Solder version	1A	30V	30V	PVC/定制 Customized	USB-M16FAH05-Q3