



NW-RJ45系列

NW-RJ45 series

NW-RJ45系列

本产品是基于市面上较为常见的螺纹连接防水连接器基础上开发的非标防水工业类RJ45连接器, 根据TA/EIA568B和ISO/IEC11801标准, 符合CAT5E, 节省时间在插头上; 电缆连接器载体护套不包括水晶头; 在商业应用中, 保护以太网连接, 这种设计可以保护标准RJ45插头里的组件。

This product is a non-standard waterproof industrial RJ45 connector developed based on the more common threaded connection waterproof connectors on the market. It complies with TA/EIA568B and ISO /IEC11801 standards, and conforms to CAT5E, saving time on the plug. The cable connector carrier sheath does not include the crystal head. In commercial applications, to protect Ethernet connections, this design can safeguard the components within the standard RJ45 plug.

- 单手操作可实现快速插拔
- 设计了按钮锁
- 比传统的信号连接器更稳定
- 坚固的压铸外壳和独特的电缆夹
- 适用于任何苛刻的户外环境
- One-handed operation enables quick plugging and unplugging
- A button lock was designed
- It is more stable than traditional signal connectors
- Sturdy die-cast housing and unique cable clamps
- It is suitable for any harsh outdoor environment

NW-RJ45 连接器

NW-RJ45 connector




NW-RJ45 参数


NW-RJ45 Parameter

产品参数	
接线方式	水晶头转接
适用线规	26 AWG
额定电流	1. 5A
工作电压	125 V AC
耐 压	1000V AC
接触阻抗	<50m Ω
绝缘电阻	>100m Ω
机械寿命	>1900次
环境温度	-40~+85℃
高温老化	85℃ /168 h
盐雾	PH6.5-7.2,NaCl, 5% 48h
防水等级	IP67(1m /0.5h)
适用线径 (OD)	($\varnothing$ 4.0- $\varnothing$ 6.5)mm

NW-RJ45螺纹款-线端插头

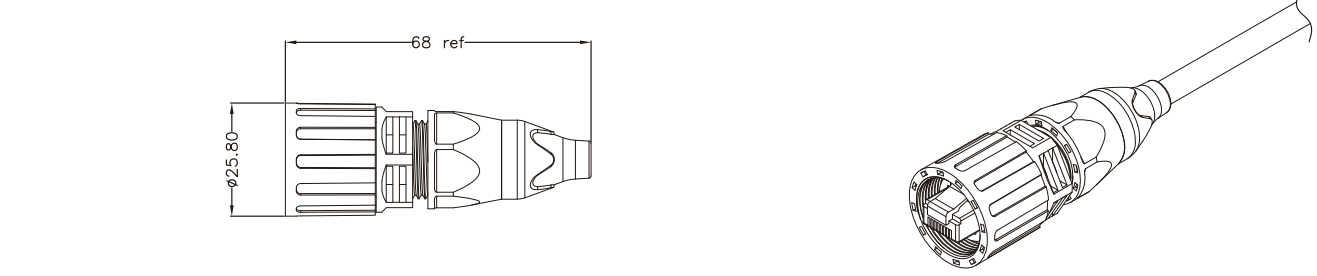

NW-RJ45螺纹款-法兰转接头

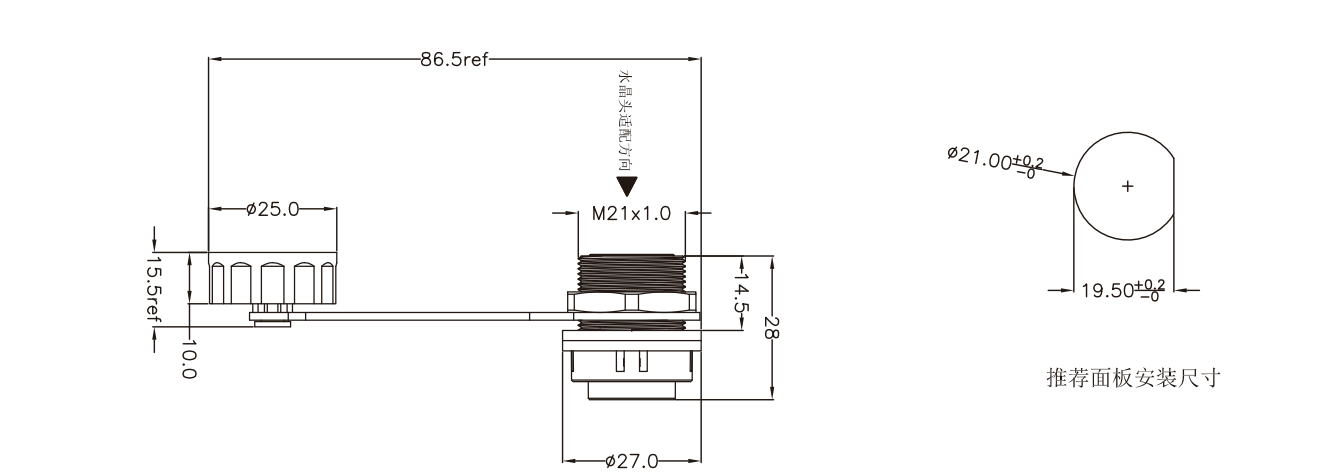

NW-RJ45塑胶法兰转接双头

